



To Order:
(661) 294-7999—voice
(661) 294-1115—fax
sales@activethermal.com

Page 13



Cool-stack II™

A 2U high quiet cooler for larger racks, larger heat loads

With six 120mm fans and an 18" depth, the Cool-stack II has the power - and the reach - to pull up to 130 CFM of hot air out of tightly-packed racks while generating low noise levels. The Cool-stack II has three temperature-controlled speeds, and is installer-programmed to switch between any two speeds as rack temperature changes. Programming can satisfy the requirements of both residential and commercial installations; in either case, heated air can be expelled through the perforated front panel or through ports on the top or rear panels. Tubing and fittings are supplied with each Cool-stack II to channel exhausted hot air from its top and rear exhaust ports to nearby closets, attics, utility rooms, etc. Two four-foot lengths of 2" diameter tubing can attach to fittings on the rear panel, and move heated air out of a rack cabinet, or into a near-by closet.

A blanking panel on the top of the Cool-stack II removes to allow the attachment of an eight-foot length of our 4" / 6" (ID/OD) acoustically-insulated flex tubing. Hot air can be moved from within a rack, up through the top of an enclosure or a closet's ceiling.

Cool-stack II — cools the rack AND the enclosure the rack is in!

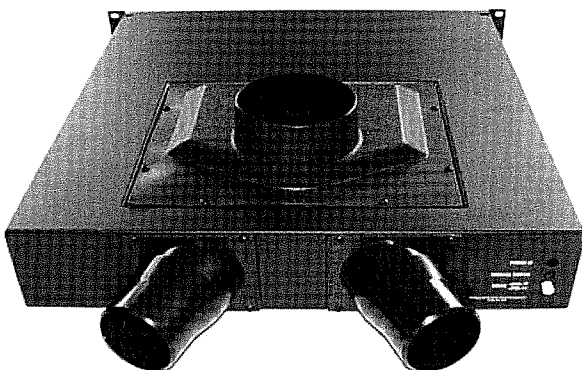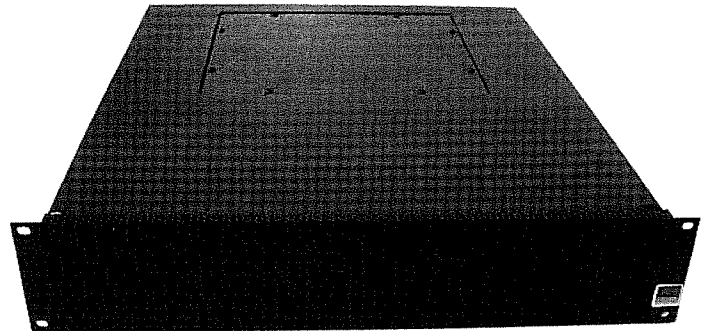

Specifications:

Dimensions: 19" w x 18" d x 3 1/2" h
Air flow: 10 to 130 CFM
Speeds: 3 (temperature controlled)
Noise level: 22 to 36 dB (A-weighted)
Finish: Black powder-coat

ATM # **00-303-01**

(Please see notes on page 20.)